

Working Pressure : 3-50 bar (low Pressure Type)


Thread Size : 1/4

Spray Angle : 45° to 80°

Material : Brass, Stainless Steel

Orifice Size : 0.2 mm to 1.78mm

With as SS filter

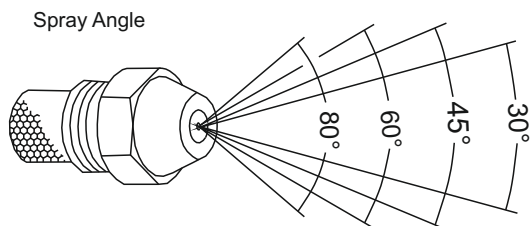

Performance Data

Code	Orifice Size (mm)	Flow rate L/Hr bar							
		2 bar	3 bar	5 bar	7 bar	10 bar	15 bar	20 bar	35 bar
	0.21	-	-	1.45	1.72	2.05	2.51	2.87	3.82
	0.23	-	-	2.16	2.56	3.06	3.74	4.32	5.72
	0.28	-	-	2.87	3.4	4.1	5.02	5.77	7.63
	0.33	-	-	4.32	5.11	6.15	7.53	8.64	11.4
	0.38	-	-	5.77	6.83	8.19	10	11.6	15.3
	0.41	-	-	7.19	8.55	10.2	12.5	14.5	16.1
	0.46	-	-	8.64	10.2	12.3	15.1	17.3	22.9
	0.54	-	8.89	11.5	13.7	16.4	20.1	23.1	30.5
	0.64	-	11.1	14.5	17.2	20.3	25.1	28.7	38.2
	0.74	-	14.2	17.5	20.6	24	30.1	34	45.8
	0.81	-	17.8	23.1	27.5	33.1	40.6	48.2	61.1
	0.89	17.9	22.1	28.7	34	41	50.2	57.7	76.3
	1.02	21.06	26.9	34.6	40.8	49.2	60.2	69.3	91.6
	1.1	25.3	31.2	40.2	47.7	57	60.8	80.8	107
	1.17	29.1	35.6	46.2	54.6	65.2	79.6	92.4	122
	1.32	32.8	39.9	51.8	61.4	73.4	89.9	104	137
	1.4	34.5	44.6	57.8	68.3	81.6	99.9	115	153
	1.52	45.8	53.3	69.3	82.1	90	120	139	183
	1.7	54.4	66.8	86.4	102	129	150	173	229
	1.78	64.1	78.2	101	120	143	175	202	267

Ordering info

OB - 1/4 -0.05 - SS

Single nozzle
type

Inlet
size

Code

Material
code